

Epson C11CF37201 dot matrix printer 612 cps

Brand : Epson

Product code: C11CF37201

Product name : C11CF37201


612cps, 9-pin, 128KB, Parallel, USB 2.0, 55db, Black

Epson C11CF37201 dot matrix printer 612 cps:



**High-performance impact printers built for demanding print environments**  
The Epson FX-890II Series offers the durability and ease of use for critical daily print requirements. These reliable 9-pin, narrow-carriage impact printers boast a long life cycle, a 3-year limited warranty and speeds up to 738 cps<sup>1</sup>. Their up-to-7.5-million-character ribbon cartridge<sup>2</sup> reduces user interventions as well as cost per page. Engineered for seamless integration into virtually any system, they include Epson ESC/P®, IBM® PPDS and MICROLINE® printer languages. Ideal for harsh environments, these workhorses race through cut-sheet, continuous or multipart forms up to 7 pages thick, and feature an intuitive control panel for easy setup and operation.

| Printing                           |                                                                                              | Endurance                         |                        |
|------------------------------------|----------------------------------------------------------------------------------------------|-----------------------------------|------------------------|
| Maximum printing width (columns) * | 80                                                                                           | Print head *                      | 9-pin                  |
| Colour *                           | ✗                                                                                            | Print head life                   | 400 million characters |
| Maximum print speed *              | 612 cps                                                                                      | Ribbon life                       | 7.5 million characters |
| Maximum print speed (draft)        | 463 cps                                                                                      | Mean time between failures (MTBF) | 20000 h                |
| Maximum print speed (LQ)           | 115 cps                                                                                      | Power                             |                        |
| Character pitch                    | 10 cpi                                                                                       | AC input voltage                  | 120 V                  |
| Built-in barcodes                  | CODABAR (NW-7), Code 128 (A/B/C), Code 39, Industrial 2/5, Matrix 2/5, POSTNET, UPC-A, UPC-E | AC input frequency                | 50 - 60 Hz             |
| Character sets                     | ISO 8859-15, Italic, PC437, PC850, PC858, Roman 8                                            | Operational conditions            |                        |
| Paper handling                     |                                                                                              | Operating temperature (T-T)       | 5 - 35 °C              |
| Cut sheet thickness range          | 0.12 - 0.46 mm                                                                               | Storage temperature (T-T)         | -30 - 60 °C            |
| Continuous paper thickness range   | 0.46 - 0.46 mm                                                                               | Operating relative humidity (H-H) | 10 - 80%               |
| Features                           |                                                                                              | Storage relative humidity (H-H)   | 30 - 60%               |
| Product colour *                   | Black                                                                                        | Weight & dimensions               |                        |
| Buffer size *                      | 128 KB                                                                                       | Width                             | 437 mm                 |
| Sound pressure level (printing) *  | 55 dB                                                                                        | Depth                             | 376 mm                 |
| Page description languages *       | ESC P, PPDS                                                                                  | Height                            | 177 mm                 |
| Ports & interfaces                 |                                                                                              | Weight                            | 7.17 kg                |
| Standard interfaces *              | Parallel, USB 2.0                                                                            | Technical details                 |                        |
|                                    |                                                                                              | Sustainability certificates       | ENERGY STAR            |

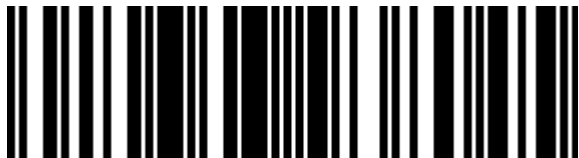

0010343938045



010343938045

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.