



DELL P2724DEB 68.6 cm (27") LCD 2560 x 1440 pixels Quad HD

Brand : DELL

Product code: DELL-P2724DEB

Product name : P2724DEB

- 68.6cm (27") Quad HD 2560 x 1440 LED IPS
- 8ms, 16:9, 350cd/m², 1000:1
- USB, HDMI, DisplayPort
- 68.6cm (27") Quad HD 2560 x 1440 LED IPS, 16:9, 350cd/m², 16.78M, 8ms, 178°/178°, 1000:1

DELL P2724DEB 68.6 cm (27") LCD 2560 x 1440 pixels Quad HD:

Connect like you're there with a 27-inch QHD IPS display built for effortless collaboration.
DELL P2724DEB. Display diagonal: 68.6 cm (27"), Display technology: LCD, Display resolution: 2560 x 1440 pixels. Megapixel (approx.): 4 MP, Maximum frame rate: 60 fps. RMS rated power: 10 W. Product colour: Black, Silver, Screen shape: Flat, Panel mounting interface: 100 x 100 mm. USB version: 3.2 Gen 1 (3.1 Gen 1), USB Power Delivery up to: 90 W




Display		Ports & interfaces	
Display diagonal *	68.6 cm (27")	USB Power Delivery up to	90 W
Display technology *	LCD	Computer system	
Panel type	IPS	Computer system *	✗
LED backlight	✓	Windows operating systems supported	Windows 10, Windows 11
Display resolution *	2560 x 1440 pixels	Mac operating systems supported	MacOS
Display brightness	350 cd/m ²	Performance	
HD type *	Quad HD	On Screen Display (OSD)	✓
Touchscreen *	✗	HDCP	✓
Native aspect ratio *	16:9	HDCP version	1.4
Response time	8 ms	Power	
Contrast ratio (typical)	1000:1	Power consumption (typical)	26 W
Viewing angle, horizontal	178°	Power consumption (max)	210 W
Viewing angle, vertical	178°	Power consumption (standby)	0.3 W
Display number of colours	16.78 million colours	AC input voltage	100 - 240 V
sRGB coverage (typical)	99%	AC input frequency	50/60 Hz
Pixel pitch	0.2331 x 0.2331 mm	Energy efficiency scale	A to G
Display diagonal (metric)	68.47 cm	Energy efficiency class (SDR) *	F
Surface hardness	3H	Energy consumption (SDR) per 1000 hours *	26 kWh
Anti-glare screen	✓	Power supply type	Internal
Camera		Operational conditions	
Built-in camera	✓	Operating temperature (T-T)	0 - 40 °C
Megapixel (approx.)	4 MP	Storage temperature (T-T)	-20 - 60 °C
Maximum frame rate	60 fps	Operating relative humidity (H-H)	10 - 80%
Audio		Storage relative humidity (H-H)	5 - 90%
Built-in speaker(s)	✓	Weight & dimensions	
Number of built-in speakers	2	Display width	611.8 mm
RMS rated power	10 W	Display depth	59.6 mm
Design			
Product colour *	Black, Silver		

Design		Weight & dimensions	
Screen shape	Flat	Display height	415.8 mm
VESA mounting *	✓	Display weight	5.65 kg
Panel mounting interface	100 x 100 mm	Width (with stand)	611.8 mm
Bezel width (bottom)	1.72 cm	Depth (with stand)	230 mm
Bezel width (side)	7.52 mm	Height (with stand)	440.8 mm
Bezel width (top)	3.84 cm	Weight (with stand)	8.27 kg
Height adjustment	✓	Packaging data	
Height adjustment	15 cm	Package weight	11.3 kg
Pivot	✓	Packaging content	
Pivot angle	-90 - 90°	Stand included	✓
Swivelling	✓	Remote control included	✗
Swivel angle range	-45 - 45°	Stylus pen	✗
Tilt angle range	-5 - 21°	Power adapter included	✓
Ports & interfaces		Cables included	DisplayPort, USB Type-A to USB Type-B, USB Type-C
HDMI ports quantity *	1	Sustainability	
HDMI version	1.4	Sustainability certificates	ENERGY STAR, TCO
DVI port *	✗	Network	
DisplayPorts quantity	1	Ethernet LAN *	✓
USB ports quantity	6	Ethernet LAN (RJ-45) ports	1
USB version	3.2 Gen 1 (3.1 Gen 1)	Wi-Fi *	✗
USB 2.0 Type-B ports quantity	1	Technical details	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	3	Compliance certificates	RoHS
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	1	Carbon footprint	
Number of USB Type-B upstream ports quantity	1	Total carbon footprint (kg of CO2e)	604
Number of USB Type-C upstream ports quantity	1	Total carbon emissions, standard deviation (kg of CO2e)	157
USB Type-A downstream ports quantity	3	Carbon emissions, manufacturing (kg of CO2e)	333.41
USB Type-C downstream ports quantity	1	Carbon emissions, logistics (kg of CO2e)	57.98
Microphone in	✓	Carbon emissions, energy usage (kg of CO2e)	205.96
USB port *	✓	Carbon emissions, end-of-life (kg of CO2e)	6.64
USB Type-C DisplayPort Alternate Mode	✓	PAIA version	PAIA 1.3.2, 2022
USB Power Delivery (USB PD)	✓		



5397184657065

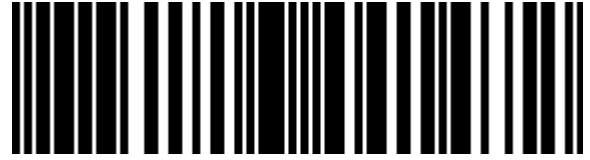

0884116441472



884116441472



5715063801161

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.