



**APC SBP1500RM power distribution unit (PDU) 8 AC outlet(s)
Black**

Brand : APC

Product code: SBP1500RM

Product name : SBP1500RM

1500 VA, 120V, 15A, 1 x NEMA 5-15P In, 8 x NEMA 5-15R Out, 8 ft Cord In / 4 ft Out, 2.95 kg, Black

APC SBP1500RM power distribution unit (PDU) 8 AC outlet(s) Black:

APC Maintenance Bypass Panels , Input: 120V , Input Connections: NEMA L5-30P , Cord Length: 8 feet (2.44 meters) , Output: 120V , Output Connections: NEMA 5-20R,NEMA L5-30R

Quick Transfer Rate


Transfer rate is within the industry standard and within the time power supplies will typically drop loads. The transfer of one power source to another is seamless to the connected equipment avoiding disruption of equipment performance.

Wrap Around System Bypass

(3) Breaker maintenance bypass panel to isolate the UPS from the critical load
APC SBP1500RM. PDU types: Basic, Product colour: Black. AC outlets quantity: 8 AC outlet(s), AC outlet types: NEMA 5-15R, Power plug: NEMA 5-15P. Nominal input voltage: 120 V, AC input frequency: 50 - 60 Hz, Nominal output voltage: 120 V. Compliance certificates: RoHS, Certification: TUV. Width: 432 mm, Depth: 76 mm, Height: 89 mm

Design		Operational conditions	
PDU types *	Basic	Operating temperature (T-T)	0 - 40 °C
Product colour	Black	Storage temperature (T-T)	-15 - 45 °C
Ports & interfaces		Operating relative humidity (H-H)	0 - 95%
AC outlets quantity *	8 AC outlet(s)	Storage relative humidity (H-H)	0 - 95%
Power plug	NEMA 5-15P	Operating altitude	0 - 4500 m
AC outlet types *	NEMA 5-15R	Non-operating altitude	0 - 15000 m
Output connections	8 x NEMA 5-15R	Weight & dimensions	
Power		Width	432 mm
Nominal input voltage *	120 V	Depth	76 mm
AC input frequency	50 - 60 Hz	Height	89 mm
Nominal output voltage	120 V	Weight	2.95 kg
Load capacity	1500 VA	Packaging data	
Maximum input current per phase	15 A	Package weight	3.8 kg
Maximum total current draw per phase	15 A	Package width	463 mm
Certificates		Package depth	295 mm
Compliance certificates	RoHS	Package height	151 mm
Certification	TUV		



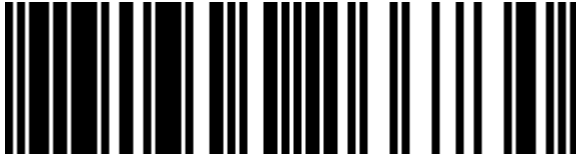

0731304266730



731304266730

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.