



## APC SMX2200RMLV2U uninterruptible power supply (UPS) 2.2 kVA 1980 W

**Brand :** APC

**Product code:** SMX2200RMLV2U


**Product name :** SMX2200RMLV2U

AC 120V, 1980W, 2200VA, RS-232, USB, Lead-Acid, 2U, 38.45kg, Black

APC SMX2200RMLV2U. Output power capacity: 2.2 kVA, Output power: 1980 W, Input operation voltage (min): 70 V. Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 7 min, Typical backup time at half load: 26 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 2U. Compliance certificates: RoHS, Certification: NOM, TUV, UL, FCC. Width: 431 mm, Depth: 667 mm, Height: 85 mm



| Features                         |                         | Battery                     |                     |
|----------------------------------|-------------------------|-----------------------------|---------------------|
| Output power capacity *          | 2.2 kVA                 | Battery recharge time       | 3 h                 |
| Output power *                   | 1980 W                  | Hot-swap battery            | ✓                   |
| Input operation voltage (min) *  | 70 V                    | Design                      |                     |
| Input operation voltage (max) *  | 153 V                   | Form factor *               | Rackmount/Tower     |
| Input frequency *                | 50/60 Hz                | Rack capacity               | 2U                  |
| Output operation voltage (min)   | 100 V                   | Cable length                | 2.44 m              |
| Output operation voltage (max)   | 127 V                   | Product colour *            | Black               |
| Surge energy rating              | 540 J                   | Display type                | LCD                 |
| Response time                    | 2 ms                    | LED indicators              | Battery replacement |
| Efficiency                       | 97.6%                   | Certificates                |                     |
| Emergency Power Off (EPO)        | ✓                       | Compliance certificates     | RoHS                |
| Noise level                      | 55 dB                   | Certification               | NOM, TUV, UL, FCC   |
| Surge protection                 | ✓                       | Weight & dimensions         |                     |
| Ports & interfaces               |                         | Width                       | 431 mm              |
| USB 2.0 ports quantity           | 1                       | Depth                       | 667 mm              |
| Serial ports quantity            | 1                       | Height                      | 85 mm               |
| Ethernet LAN (RJ-45) ports       | 1                       | Weight                      | 38.5 kg             |
| Battery                          |                         | Packaging data              |                     |
| Battery technology               | Sealed Lead Acid (VRLA) | Package weight              | 45.4 kg             |
| Typical backup time at full load | 7 min                   | Logistics data              |                     |
| Typical backup time at half load | 26 min                  | Harmonized System (HS) code | 85078000            |
|                                  |                         | Other features              |                     |
|                                  |                         | Interface                   | RJ45/USB            |
|                                  |                         | Input connection type       | NEMA L5-30P         |
|                                  |                         | Nominal output voltage      | 120 V               |
|                                  |                         | Nominal input voltage       | 120 V               |
|                                  |                         | Package dimensions (WxDxH)  | 596 x 869 x 243 mm  |

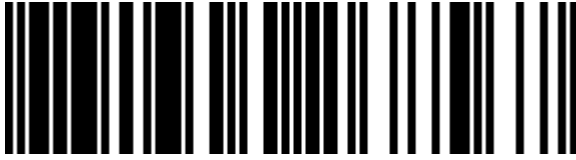

0731304268567



731304268567

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.