



APC Smart-UPS RT 6000VA uninterruptible power supply (UPS) Double-conversion (Online) 6 kVA 4200 W 6 AC outlet(s)



Brand : APC

Product code: SURTD6000RMXLP3U

Product name : Smart-UPS RT 6000VA


6kVA, 208V, Rack, 3U, 4x 5-20R, 1x L6-30R, 1x L14-30R NEMA outlets

APC Smart-UPS RT 6000VA uninterruptible power supply (UPS) Double-conversion (Online) 6 kVA 4200 W 6 AC outlet(s):



Smart-UPS On-Line provides high-density, true double-conversion online power protection for servers, voice/data networks, medical labs, and light industrial applications. When business-critical systems require runtime in hours, not minutes, Smart-UPS On-Line can be configured with matching battery packs to comply with aggressive runtime demands. The included PowerChute™ management software provides unattended graceful shutdown of network operating systems. All models 6 kVA and above include an integrated network management card for remote management (optional on models below 6 kVA). The entire Smart-UPS On-Line family provides value to customers with demanding power conditions, including a very wide input voltage window, extremely tight output voltage regulation, internal bypass, and input power factor correction.

Features		Battery	
UPS topology *	Double-conversion (Online)	Battery recharge time	2.5 h
Output power capacity *	6 kVA	Replacement battery cartridge	APCRBC140
Output power *	4200 W	Design	
Waveform *	Sine	Form factor *	Rackmount
Input operation voltage (min) *	85 V	Rack capacity	3U
Input operation voltage (max) *	236 V	Cable length	3.05 m
Input frequency *	50/60 Hz	Product colour *	Black
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Output voltage regulation	5%	Operational conditions	
Surge energy rating	480 J	Operating temperature (T-T)	0 - 40 °C
Heat dissipation	1780 BTU/h	Storage temperature (T-T)	-15 - 45 °C
Efficiency	90%	Operating relative humidity (H-H)	0 - 95%
Crest factor	3:1	Storage relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Operating altitude	0 - 3000 m
Output voltage Total Harmonic Distortion (THD)	2%	Non-operating altitude	0 - 15240 m
Noise level	55 dB	Certificates	
Audible alarm(s)	✓	Certification	CSA,FCC Part 15 Class A,UL 1778
Audible alarm modes	Alarm when on battery, Low battery alarm	Packaging content	
Ports & interfaces		Rack mount kit	✓
AC outlet types	NEMA 5-20R, NEMA L6-30R, NEMA L14-30R	Management card included	✓
Power plug	NEMA L14-30P	Manual	✓
AC outlets quantity	6 AC outlet(s)	Weight & dimensions	
USB port	✓	Width	432 mm
Serial interface	✓	Depth	660 mm
Serial interface type	RS-232	Height	130 mm
Network card slot	✓	Weight	58.1 kg
Emergency Power Off (EPO) connector	✓	Packaging data	
Battery		Package width	980 mm
Battery technology	Lead-Acid	Package depth	603 mm
Number of batteries included	2 pc(s)	Package height	347 mm
Battery life (max)	5 year(s)	Package weight	72.3 kg

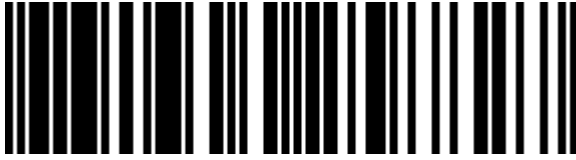

0731304258827



731304258827

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.