

ASUS TUF Gaming 1000W Gold power supply unit 20+4 pin ATX ATX Black

Brand : ASUS

Product code: 90YE00S1-B0ZA00

Product name : TUF Gaming 1000W Gold

- Capacitors and chokes pass demanding tests to achieve Military-grade Certification
 - Dual ball fan bearings can last up to twice as long as sleeve bearing designs
 - A protective PCB coating protects against moisture, dust, and extreme temperatures
 - An 80 Plus Gold Certification is the result of Japanese capacitors and other premium components
 - Axial-tech fan design features a smaller fan hub that facilitates longer blades and a barrier ring that increases downward air pressure
 - Fully modular etched cables keep your rig neat and tidy
 - 10-year warranty included
- 1000W, ATX12V, 80Plus Gold, 100 - 240V, 2.48kg




Power		Ports & interfaces	
Total power *	1000 W	PCI Express power connectors (8-pin)	4
AC input voltage *	100 - 240 V	PCI Express power connectors (16-pin)	1
Power Factor Correction (PFC) type	Active	PCI Express power cable length	67.5 cm
Combined power (+3.3V)	130 W	CPU power connector (4+4 pin)	✓
Combined power (+12V)	1000 W	CPU power cable length	65 cm
Combined power (+5V)	130 W	ATX power connector (20+4 pin)	✓
Combined power (-12V)	9.6 W	Cabling type	Fully-Modular
Combined power (+5Vsb)	15 W	Performance	
Max output current (+3.3V)	25 A	80 PLUS certification *	80 PLUS Gold
Max output current (+12V)	83.3 A	Purpose *	PC
Max output current (+5V)	25 A	Power supply unit (PSU) form factor *	ATX
Max output current (-12V)	0.8 A	Design	
Max output current (+5Vsb)	3 A	Product colour	Black
Efficiency	92%	Cooling type	Active
Power protection features	Over power, Over voltage, Overcharge, Overheating, Short circuit, Under power, Under voltage	Fan diameter	13.5 cm
Ports & interfaces		Number of fans	1 fan(s)
Motherboard power connector *	20+4 pin ATX	Illumination	✗
Motherboard power cable length	61 cm	On/off switch	✓
Number of SATA power connectors	5	Weight & dimensions	
SATA power cable length	120,400 mm	Width	150 mm
Peripheral (Molex) power connectors (4-pin) *	4	Depth	150 mm
Peripheral (Molex) power cable length	150,400 mm	Height	86 mm
		Weight	2.48 kg



0195553786485



195553786485

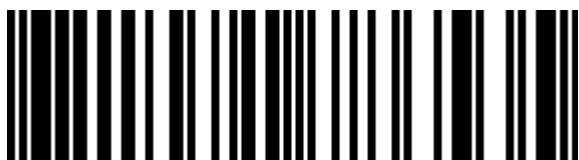

4711081786535

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.