



Canon EOS R6 Mark II + RF 24-105mm F4 L IS USM

Brand : Canon                      Product family: EOS                      Product code: 5666C011

Product name : EOS R6 Mark II  
+ RF 24-105mm F4 L IS USM

- High image quality featuring a new 24.2 megapixel full-frame CMOS sensor
  - DIGIC X Image Processor with an ISO range of 100-102400
  - 6K oversampled uncropped 4K movie at up to 60 fps
  - Automatic subject detection of people, animals, and vehicles
  - In-body Image Stabilizer with up to 8 stops of Shake Correction with Coordinated Control IS
  - UVC/UAC compatibility allows use as a web camera and stream live video in Full HD
- EOS R6 Mark II + RF 24-105mm F4 L IS USM  
Canon EOS R6 Mark II + RF 24-105mm F4 L IS USM. Camera type: MILC, Megapixel (approx.): 24.2 MP, Sensor type: CMOS. ISO sensitivity (max): 102400. Fastest camera shutter speed: 1/8000 s. Wi-Fi. Touchscreen. Viewfinder type: Electronic. Weight: 588 g. Product colour: Black



| Picture quality                  |                                                                                                                                                                                                                             | Viewfinder                          |                                                                                   |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------|
| Camera type *                    | MILC                                                                                                                                                                                                                        | Viewfinder frame rate (smooth mode) | 60 fps                                                                            |
| Megapixel (approx.) *            | 24.2 MP                                                                                                                                                                                                                     | Viewfinder resolution (approx.)     | 3690000 pixels                                                                    |
| Sensor type *                    | CMOS                                                                                                                                                                                                                        | Ports & interfaces                  |                                                                                   |
| Sensor cleaning system           | Ultrasonic vibration                                                                                                                                                                                                        | USB version *                       | 3.2 Gen 2 (3.1 Gen 2)                                                             |
| Still image resolution(s) *      | 6000 x 4000, 3984 x 2656, 2976 x 1984, 2400 x 1600, 6000 x 3368, 3984 x 2240, 2976 x 1680, 2400 x 1344, 5328 x 4000, 3552 x 2664, 2656 x 1992, 2112 x 1600, 4000 x 4000, 2656 x 2656, 1984 x 1984, 1600 x 1600, 4000 x 4000 | USB connector                       | USB Type-C                                                                        |
|                                  |                                                                                                                                                                                                                             | HDMI *                              | ✓                                                                                 |
|                                  |                                                                                                                                                                                                                             | HDMI connector type                 | Micro                                                                             |
|                                  |                                                                                                                                                                                                                             | Microphone in                       | ✓                                                                                 |
|                                  |                                                                                                                                                                                                                             | Headphone outputs                   | 1                                                                                 |
| Image stabilizer *               | ✓                                                                                                                                                                                                                           | Headphone connectivity              | 3.5 mm                                                                            |
| Supported aspect ratios          | 1:1, 3:2, 4:3, 16:9                                                                                                                                                                                                         | Network                             |                                                                                   |
| Image sensor size (W x H)        | 35.9 x 23.9 mm                                                                                                                                                                                                              | Bluetooth *                         | ✓                                                                                 |
| Sensor format                    | Full-frame                                                                                                                                                                                                                  | Bluetooth version                   | 5                                                                                 |
| Image formats supported *        | JPEG, Raw, C-Raw, HEIF                                                                                                                                                                                                      | Bluetooth Low Energy (BLE)          | ✓                                                                                 |
| Lens system                      |                                                                                                                                                                                                                             | Wi-Fi *                             | ✓                                                                                 |
| Lens mount interface             | Canon RF                                                                                                                                                                                                                    | Wi-Fi standards                     | 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)                  |
| Focusing                         |                                                                                                                                                                                                                             | Camera                              |                                                                                   |
| Focus *                          | TTL                                                                                                                                                                                                                         | White balance *                     | Auto, Cloudy, Custom modes, Daylight, Flash, Fluorescent, Manual, Shade, Tungsten |
| Focus adjustment *               | Auto/Manual                                                                                                                                                                                                                 | Scene modes *                       | Auto                                                                              |
| Auto focusing (AF) modes *       | Continuous Auto Focus, One Shot Focus, Servo Auto Focus                                                                                                                                                                     | Shooting modes *                    | Intelligent auto                                                                  |
| Auto Focus (AF) object detection | Animal, Bird, Eye, Face, People, Vehicle                                                                                                                                                                                    | Self-timer delay *                  | 2,10 s                                                                            |
| Face tracking                    | ✓                                                                                                                                                                                                                           | Dioptrre correction                 | ✓                                                                                 |
| Auto Focus (AF) lock             | ✓                                                                                                                                                                                                                           | Dioptr adjustment (D-D)             | -4 - 2                                                                            |
| Auto Focus (AF) assist beam      | ✓                                                                                                                                                                                                                           | Histogram                           | ✓                                                                                 |
| Exposure                         |                                                                                                                                                                                                                             | Live view                           | ✓                                                                                 |
| ISO sensitivity (min) *          | 100                                                                                                                                                                                                                         | Orientation sensor                  | ✓                                                                                 |
| ISO sensitivity (max) *          | 102400                                                                                                                                                                                                                      | Anti-dust function                  | ✓                                                                                 |
| ISO sensitivity                  | 100, 6400, 25600, 51200                                                                                                                                                                                                     | Smartphone/tablet remote support    | ✓                                                                                 |
| Light exposure modes *           | Aperture priority AE, Auto, Manual, Shutter priority AE                                                                                                                                                                     |                                     |                                                                                   |
| Light exposure control           | Program AE                                                                                                                                                                                                                  |                                     |                                                                                   |


| Exposure                                  |                                                            | Camera                                     |                      |
|-------------------------------------------|------------------------------------------------------------|--------------------------------------------|----------------------|
| Light exposure correction *               | ± 3EV (1/2EV; 1/3EV step)                                  | View on smartphone                         | ✓                    |
| Light metering *                          | Centre-weighted, Evaluative (Multi-pattern), Partial, Spot | Tripod mounting supported *                | ✓                    |
| Auto Exposure (AE) lock                   | ✓                                                          | Image processor                            | DIGIC X              |
| Number of measurement zones               | 384                                                        | Design                                     |                      |
| Shutter                                   |                                                            | Product colour *                           | Black                |
| Fastest camera shutter speed *            | 1/8000 s                                                   | Dustproof                                  | ✓                    |
| Slowest camera shutter speed *            | 30 s                                                       | Splash proof                               | ✓                    |
| Camera shutter type                       | Mechanical                                                 | Battery                                    |                      |
| Flash                                     |                                                            | Battery technology *                       | Lithium-Ion (Li-Ion) |
| Flash exposure lock                       | ✓                                                          | Battery type                               | LP-E6NH              |
| External flash connector                  | ✓                                                          | Number of batteries supported              | 1                    |
| Flash exposure compensation               | ✓                                                          | Battery level indicator                    | ✓                    |
| Shoe mounting point                       | ✓                                                          | Power                                      |                      |
| Shoe mounting point type                  | Hot shoe                                                   | USB Type-C charging port *                 | ✓                    |
| Video                                     |                                                            | USB Type-C required charging power (min) * | 7.5 W                |
| Video recording *                         | ✓                                                          | USB Type-C required charging power (max) * | 7.5 W                |
| Video resolutions                         | 1920 x 1080,3840 x 2160 pixels                             | Operational conditions                     |                      |
| Video formats supported                   | H.264, H.265                                               | Operating temperature (T-T)                | 2 - 40 °C            |
| Colour sampling                           | YCbCr4:2:0 8-bit, YCbCr4:2:2 10-bit                        | Weight & dimensions                        |                      |
| Audio                                     |                                                            | Width                                      | 138.4 mm             |
| Built-in microphone *                     | ✓                                                          | Depth                                      | 88.4 mm              |
| Built-in speaker(s)                       | ✓                                                          | Height                                     | 98.4 mm              |
| Audio system                              | stereo                                                     | Weight                                     | 588 g                |
| Wind filter                               | ✓                                                          | Weight (including battery)                 | 670 g                |
| Audio formats supported                   | LPCM, AAC                                                  | Packaging data                             |                      |
| Memory                                    |                                                            | Quantity per pack                          | 1 pc(s)              |
| Compatible memory cards *                 | SD, SDHC, SDXC                                             | Package width                              | 225 mm               |
| Memory slots                              | 2                                                          | Package depth                              | 282 mm               |
| Display                                   |                                                            | Package height                             | 188 mm               |
| Display *                                 | LCD                                                        | Package weight                             | 2.32 kg              |
| Touchscreen *                             | ✓                                                          | Packaging content                          |                      |
| Display diagonal (metric)                 | 7.5 cm                                                     | Neck strap included                        | ✓                    |
| Display resolution                        | 1620000 dot                                                | AC adapter included *                      | ✗                    |
| Display aspect ratio                      | 3:2                                                        | Battery charger included                   | ✓                    |
| Vari-angle LCD display                    | ✓                                                          | Batteries included                         | ✓                    |
| Viewfinder                                |                                                            | Logistics data                             |                      |
| Viewfinder type                           | Electronic                                                 | Products per pallet                        | 96 pc(s)             |
| Magnification                             | 0.76x                                                      |                                            |                      |
| Viewfinder screen size                    | 0.5"                                                       |                                            |                      |
| Viewfinder frame rate (power saving mode) | 120 fps                                                    |                                            |                      |



0013803348941



013803348941

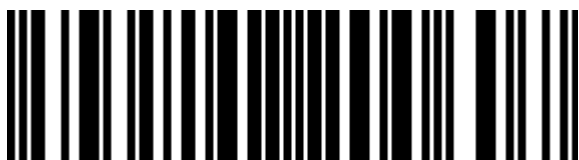

4549292200607

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.